


Transistoren aus der Ungarischen Volksrepublik

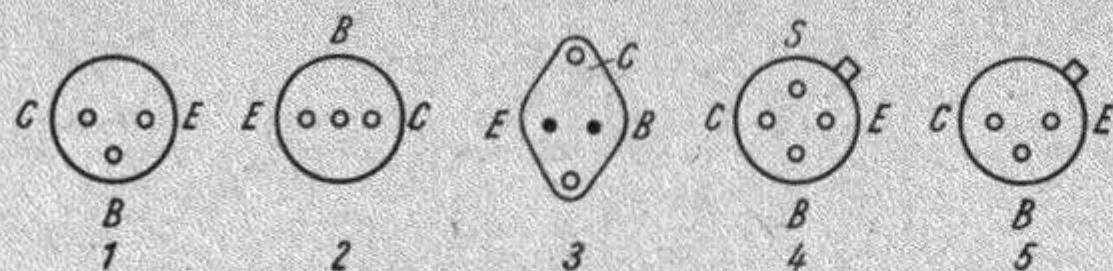

Typ	U_{CB0} V	I_{Cmax} [A] mA	P_{Cmax} [W] mW	β [α]	bei $I_E (I_C)$ mA [A]	F_T [f_α] MHz	R_{th} [grd/W] grd/mW	t_j °C		Verwendung	An- schluß- schema
OC 1044	15	5	80	100	1	[15]	0,6	75		} AM-Eingang AM-ZF	1
OC 44 K	18	24	80	100	1	14	0,6	75			1
OC 1045	15	5	80	50	1	[6]	0,6	75			1
OC 1070	32	10	125	30	0,5	[0,4]	0,4	75			2
OC 1071	32	10	125	47	3	[0,4]	0,4	75			2
OC 1072	32	50	125	70	10	[0,3]	0,3	75			1
OC 1074	20	300	—	100	50	[1,5]	0,09	75			1
OC 1075	32	10	125	90	3	[0,6]	0,4	75			2
OC 1076	32	125	125	45	10	[0,3]	0,3	75			1
OC 1077	60	125	—	45	10	[0,3]	0,3	75			1
OC 1079	26	300	—	60	50	[0,8]	0,09	75			1

Typ	U_{CBO} V	I_{Cmax} [A] mA	P_{Cmax} [W] mW	β [α]	bei $I_E(I_C)$ mA [A]	F_T [fα] MHz	R_{th} [grd/W] grd/mW	t_j °C		Verwendung	An- schluß- schema
ASZ 1015	80	[6]	[20]	40	([1])	[0,25]	[1,5]	90			3
ASZ 1016	60	[6]	[20]	75	([1])	[0,25]	[1,5]	90			3
ASZ 1017	60	[6]	[20]	50	([1])	[0,25]	[1,5]	90			3
ASZ 1018	80	[6]	[20]	70	([1])	[0,25]	[1,5]	90			3
AD 1202	45	[1,5]	—	35	300	[0,2]	[3]	75			3
AD 1203	60	[1,5]	—	35	300	[0,2]	[3]	75			3
OC 26	40	[3,5]	[12,5]	30	([1])	[0,2]	[1,2]	90			3
OC 1016	16	[1,5]	—	35	300	[0,2]	[6]	75			3
AC 107	15	5	—	60	0,3	[2]	0,6	75		rauscharm	1
AC 125	32	200	500	125	(2)	[1,3]	0,3	75			1
AC 126	32	200	—	180	(2)	[1,7]	0,3	75			1
AC 125 F	32	200	—	125	(2)	[1,3]	0,3	75		rauscharm	1
AC 128	32	500	—	90	(300)	[1,5]	0,08	90			1
AF 134	25	10	60	100	(1)	55	0,5	75		} UKW	4
AF 135	25	10	60	100	(1)	50	0,5	75			4
AF 136	25	10	60	80	(1)	40	0,5	75			4
AF 136 T	20	10	60	80	(1)	45	0,9	75		} AM-Eingang	1
AF 137	25	10	60	60	(1)	35	0,5	75			4
AF 137 T	20	10	60	60	(1)	35	0,9	75		} FM-ZF	1

Typ	U_{CBO} V	I_{Cmax} [A] mA	P_{Cmax} [W] mW	β [α]	bei $I_E(I_C)$ mA [A]	F_T [fα] MHz	R_{th} [grd/W] grd/mW	t_j °C		Verwendung	An- schluß- schema
AF 139	20	10	60	50	(1,5)	500	0,4	90		UHF	4
AF 106	20	10	60	30	(1)	220	0,4	90		UKW	4
BFY 33	50	500	700	40	(5)	100	0,22	200	npn		5
BFY 33 T	50	500	700	25	(5)	80	0,22	200	npn		5
BFY 34	75	500	700	40	(5)	100	0,22	200	npn		5
BFY 34 T	75	500	700	25	(5)	80	0,22	200	npn		5
BC 107	20	200	260	235	(2)	250	0,5	175	npn		4
BC 108	20	200	260	330	(2)	250	0,5	175	npn		4
BC 109	20	200	260	400	(2)	300	0,5	175	npn		4
BF 177		40	600	20	(15)	120			npn		5
BF 178		50	600	20	(30)	120			npn		5
BF 184	30	30	145	115	(1)	300			npn		4
BF 185	30	30	145	67	(1)	220			npn		4